




Anwendungen / Application

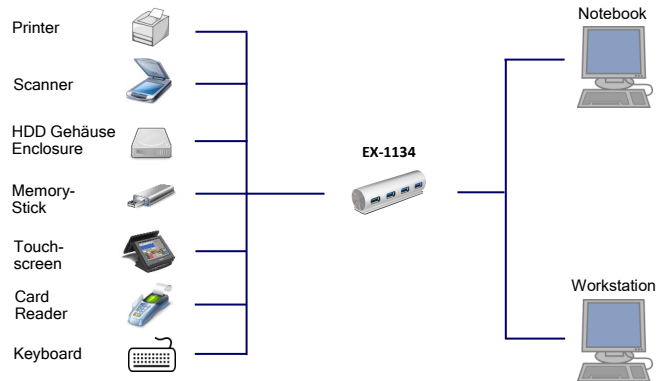

USB 3.0 / 3.1(Gen1) Metall HUB mit 4 Ports ein einem elegantem Metall-Gehäuse

USB 3.0 / 3.1(Gen1) Metal HUB with 4 ports in a fashionable metal case

Beschreibung

Mit der EX-1134 erweitern Sie einen USB 3.0 / 3.1(Gen1) Ausgang mit C-Buchse vom Notebook oder Desktop Rechner auf 4 weitere USB 3.0 Ports. Es ist dann möglich bis zu vier externen USB 2.0 oder 3.0 Peripheriegeräte an einen USB 2.0 oder 3.0 Port von Notebooks oder Desktop Rechner anzuschließen. Er ist sehr kompakt, elegant und rund und alle vier USB Ports sind immer erreichbar. Das USB 3.0 Kabel ist nur 37cm lang.

Description

With the EX-1134 you can extend from one USB 3.0 / 3.1(Gen1) port to four USB 3.0 ports. It's possible now to connect up to four external USB 2.0 or 3.0 peripherals devices to one USB 3.0 port with C-female connector from the Notebook or Desktop Computer. He it's very compact, elegant and round and all four ports are accessible. The USB 3.0 cable are 37cm long.

Merkmale

- USB 3.0 / 3.1(Gen1) Metall HUB mit 4 Ports
- Anschlüsse für bis zu vier USB Peripherie-Geräte
- Konform mit USB 3.0 Spezifikation 1.0
- Automatische Erkennung der Datentransfer-Rate für die angeschlossenen Peripheriegeräte
- Unterstützt alle USB 2.0 bis 3.0 Kompatiblen Peripheriegeräte
- Stromversorgung (Bus-Power)

Features

- USB 3.0 / 3.1(Gen1) Metal HUB with 4 ports
- Connects up to four USB devices
- Compliant with USB 3.0, Specification 1.0
- Automatic recognition the data transfer rate for the attached external peripheral devices
- Support all USB 2.0 to 3.0 compatible devices
- Power (Bus-Power)

Spezifikationen

• Datentransfer-Rate:	120Mbps bis 5Gbps
• Anschlüsse:	4 x USB 3.0 / 3.1(Gen1) A-Buchse Downstream 1 x USB 3.0 / 3.1(Gen1) A-Micro Buchse Upstream 1 x DC-Jack 5V
• Hardwaresysteme:	USB 2.0 oder 3.0
• Treiber:	Benötigt keine Treiber (Standard HUB)
• Betriebssysteme:	Windows Vista/ 7/ 8.x/ 10 (32&64-Bit), MAC OSx 10.8 oder höher
• Betriebstemperatur :	0°C bis 55° Celsius
• Lagertemperatur:	-20°C bis 85° Celsius
• Rel. Luftfeuchtigkeit:	5% bis 95%
• Stromversorgung:	Bus-Power
• Abmessung:	103 x 30 x 30 mm
• Kabellänge:	37cm
• Gewicht:	200g
• Lieferumfang:	EX-1134, USB 3.0 Kabel, Handbuch

Specification

• Data transfer rate:	120Mbps up to 5Gbps
• Connectors:	4 x USB 3.0 / 3.1(Gen1) A-female Downstream 1 x USB 3.0 / 3.1(Gen1) A-micro female Upstream 1 x DC-Jack 5V
• Hardware system:	USB 2.0 or 3.0
• Driver:	No driver necessary (Standard HUB)
• Operating systems:	Windows Vista/ 7/ 8.x/ 10 (32&64-Bit), MAC OSx 10.8 or later
• Operating Temperature :	32°F up to 131° Fahrenheit
• Storage Temperature:	-20°F up to 167° Fahrenheit
• Rel. Humidity:	5% to 95%
• Current Supply:	Bus-Power
• Size:	103 x 30 x 30 mm
• Cable length:	30cm
• Weight:	200g
• Packaging contents:	EX-1134, USB 3.0 cable, Manual

System / OS

Geprüft / Approved

Verpackung / Packaging



