




Anwendung / Application



USB zu 1S Serielle RS-232 Ports (Prolific Chip-Set)

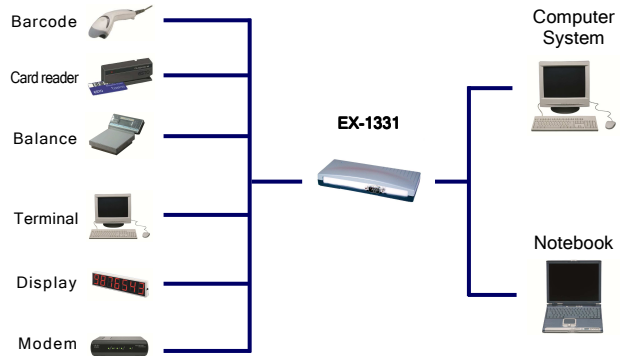

USB to 1S Serial RS-232 ports (Prolific Chip-Set)

Beschreibung

Das EX-1331 USB 1.1 zu Seriell RS-232 Gehäuse stellt einen seriellen RS-232 High Performance UART 16C550 Ausgang zur Verfügung. Es ist entwickelt worden um einen weiteren Seriellen RS-232 Ausgang in einem kompakten Gehäuse für PC, kleine Workstation oder Server über den USB 1.1 oder 2.0 Bus zu erweitern. Durch die einfache Installation, muss der Rechner nicht geöffnet werden und der Artikel EX-1331 kann bei laufendem Betrieb installiert werden.

Description

The USB 1.1 to Serial RS-232 box provides one high performance 16C550-type UART compatible RS-232 serial port. It is designed for PC, thin client or server to provide instant COM port expansion in a compact box through the USB 1.1 or 2.0 Bus. With the easy installation you don't need to open the computer system and install the EX-1331 when the system run.

Merkmale

- Schnittstelle: RS-232 V.24
- FIFO Buffer: 16C550 mit 16Byte
- I/O Adressen und Interrupt: werden vom Betriebs System vergeben
- Daten Bits: 5, 6, 7, 8
- Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signale RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Stromversorgung vom USB Bus (Bus Power)
- Plastikgehäuse

Features

- Interface: RS-232 V.24
- FIFO Buffer: 16C550 with 16Byte
- I/O addresses and Interrupt: Set from the operating system
- Data Bits: 5, 6, 7, 8
- Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signal RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Power from the USB Bus (Bus Power)
- Plastic case

Spezifikationen

- **Chip-Set:** Prolific PL2303HX
- **Datentransfer-Rate:** 50 Baud bis 115.2KBaud
- **Anschlüsse:** 1 x B-Buchse Upstream
1 x 9 Pin Seriell RS-232
- **Hardwaresysteme:** USB 1.1 oder 2.0 Ports
- **Treiber:** Win98SE/ ME/ XP/ 2000/ 2003/ Vista/ 7/ 8 (32&64-Bit)
WinCE/ Linux/ Mac OS 10.x
- **Betriebstemperatur:** 0^o bis 55^o Celsius
- **Lagertemperatur:** -40^o bis 75^o Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** Über den USB Port
- **Abmessung:** 150 x 70 x 30 mm
- **Gewicht:** 360g
- **Lieferumfang:** EX-1331, USB A-Stecker auf B-Stecker Kabel,
Treiber CD, Handbuch

Specifications

- **Chip-Set:** Prolific PL2303HX
- **Data transfer rate:** 50 Baud up to 115.2KBaud
- **Connectors:** 1 x B-female Upstream
1 x 9 pin serial RS-232
- **Hardware system:** USB 1.1 or 2.0 ports
- **Driver:** Win98SE/ ME/ XP/ 2000/ 2003/ Vista/ 7/ 8 (32&64-Bit)
WinCE/ Linux/ Mac OS 10.x
- **Operating Temperature:** 32^o up to 131^o Fahrenheit
- **Storage Temperature:** -40^o up to 167^o Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** Via USB port
- **Size:** 150 x 70 x 30 mm
- **Weight:** 360g
- **Packaging contents:** EX-1331, USB cable A-male to B-male,
Driver CD, Manual

System / OS



Geprüft / Approved



Verpackung / Packaging

