


Anwendung / Application



USB 3.0 Card Reader und HUB mit 3 Ports

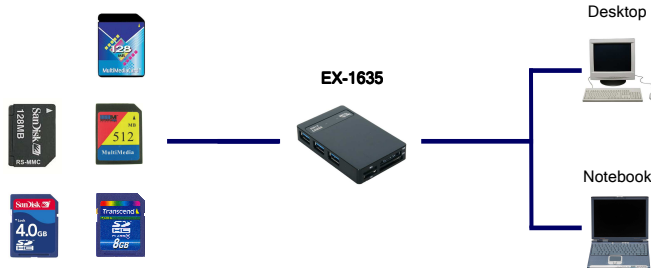

USB 3.0 Card Reader and HUB with 3 Ports

Beschreibung

Der EX-1635 USB 3.0 Card Reader für SD / SDHC, Memory Stick, usw. Karten hat zusätzlich noch einen USB 3.0 Hub eingebaut mit drei weiteren Ports. Die EX-1635 ist Plug-and-Play und kann ohne Treiber installiert werden.

Merkmale

- USB 3.0 Card Reader
- USB 3.0 HUB mit 3 Ports
- Integrierter „All in One“ Card Reader für alle Memory Karten
- Unterstützt SD / SDHC, Memory Stick, TF, M2, MMC
- LED Stromanzeige
- Stromversorgung vom USB Bus (Bus Power) und Netzteil
- Unterstützt „Hot Swapping“ für alle USB Geräte
- Kompatibel mit USB 1.1, USB 2.0 und USB 3.0 Geräte
- Kompatibel zu USB 3.0 Spezifikationen Rev. 1.0

Spezifikationen

• Datentransfer-Rate:	Bis 5Gbps
• Anschlüsse:	1 x USB 3.0 Micro B-Buchse Upstream 3 x USB 3.0 A-Buchse Downstream
• Hardwaresysteme:	USB 2.0 und 3.0
• Betriebssysteme:	Für alle Betriebssystem geeignet
• Betriebstemperatur :	0 ^o bis 55 ^o Celsius
• Lagertemperatur:	-20 ^o bis 85 ^o Celsius
• Rel. Luftfeuchtigkeit:	5% bis 95%
• Abmessung:	100 x 63 x 30 mm
• Gewicht:	300g
• Lieferumfang:	EX-1635, USB Kabel A-B-Stecker, Netzteil, Handbuch

System / OS



Description

The EX-1635 USB 3.0 Card Reader for SD / SDHC, Memory Stick, ect. cards include also a USB 3.0 HUB with three additional ports. The EX-1635 is Plug-and-Play and can install without driver.

Features

- USB 3.0 Card Reader
- USB 3.0 HUB with 3 ports
- Built-in All in One Card Reader for memory cards
- Support SD / SDHC, Memory Stick, TF, M2, MMC
- LED Indicators for power status
- Power from USB Bus (Bus Power) or power supply
- Support "hot swapping" of all your USB devices
- Compatible with USB 1.1, USB 2.0 and USB 3.0 devices
- Compliant to USB 3.0 specification Rev. 1.0

Specifications

• Data transfer rate:	up to 5Gbps
• Connectors:	1 x USB 3.0 Micro B-female connector Upstream 3 x USB 3.0 A-female connector Downstream
• Hardware system:	USB 2.0 and 3.0
• Operating systems:	Can use for all operating system
• Operating Temperature :	32 ^o up to 131 ^o Fahrenheit
• Storage Temperature:	-20 ^o up to 167 ^o Fahrenheit
• Rel. Humidity:	5% to 95%
• Size:	100 x 63 x 30 mm
• Weight:	300g
• Packaging contents:	EX-1635, USB cable A-B-Male, Power Supply, Manual

Geprüft / Approved



Verpackung / Packaging

