
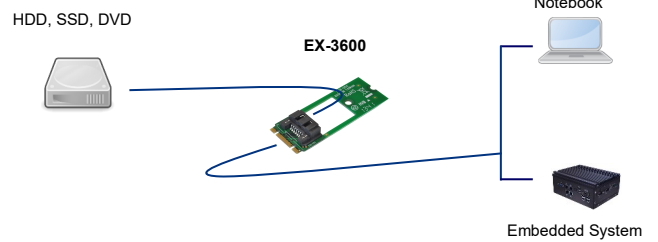


Anwendungen / Application

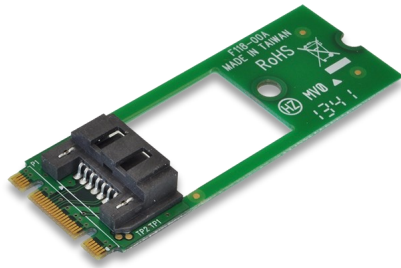

M.2 NGFF SATA zu 7 Pin SATA Konverter

M.2 NGFF SATA to 7 pin SATA converter

Beschreibung

Die beste Lösung um das breite Angebot von SATA3, SATA2 und SATA 1 Endgeräte wie zum Beispiel Festplatten, SSD oder Optical Drives an IPC Mother-Board mit M.2 NGFF Slots anzuschließen.

Description

The best solution that utilizes IPC Main Board M.2 NGFF socket to use the wide range and high capacity of SATA3, SATA2 and SATA 1 device, like Hard Drive, SSD and Optical Drives.

Merkmale

- M.2 NGFF SATA 2260-xx B-M 75 Pin PCBA Modul
- Unterstützt die Größen von M.2 NGFF Type 2260 und 2242
- 7 Pin SATA Anschluss auf dem Board
- Unterstützt alle Typen von SATA3, SATA2 und SATA 1 Geräte (Blu-Ray Drive, SSD, DVD, DVD-RAM, CD-ROM, CD-RW und Festplatten)
- Betriebssystem unabhängig und es benötigt keine Treiber

Features

- M.2 NGFF SATA 2260-xx-B-M 75 Pin PCBA module
- Supports M.2 NGFF type 2260 and 2242 plate-hole
- 7 pin SATA connector on board
- Support any type of SATA3, SATA2 and SATA 1 devices (Blu-Ray Drive, SSD, DVD, DVD-RAM, CD-ROM, CD-RW and Hard drives)
- Transparent to the operating system and no driver required

Spezifikationen

- **Datentransfer-Rate:** bis zu 6.0Gb/s
- **Anschlüsse:** 1 x 7 Pin SATA
1 x 67 Pin M.2 NGFF (B-Key / B+M-Key)
- **Hardwaresysteme:** M.2 NGFF 2260-xx-B-M Slot
- **Treiber:** Es werden keine Treiber benötigt
- **Betriebstemperatur :** 0°C bis 55° Celsius
- **Lagertemperatur:** -40°C bis 75° Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Abmessung:** 60 x 22 mm
- **Gewicht:** 50g
- **Lieferumfang:** EX-3600, Handbuch

Specification

- **Data transfer rate:** up to 6.0Gb/s
- **Connectors:** 1 x 7 pin SATA
1 x 67 pin M.2 NGFF (B-Key / B+M-Key)
- **Hardware system:** M.2 NGFF 2260-xx-B-M slot
- **Driver:** Don't need driver
- **Operating Temperature :** 32°F till 131° Fahrenheit
- **Storage Temperature:** -40°F till 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Size:** 60 x 22 mm
- **Weight:** 50g
- **Packaging contents:** EX-3600, Manual

System / OS

Geprüft / Approved

Verpackung / Packaging



UNIX

